


# 6" DOWNLIGHT 14.5W TITANIUM CRI<sup>SP</sup> LED SERIES 4.0



CRI<sup>SP</sup>

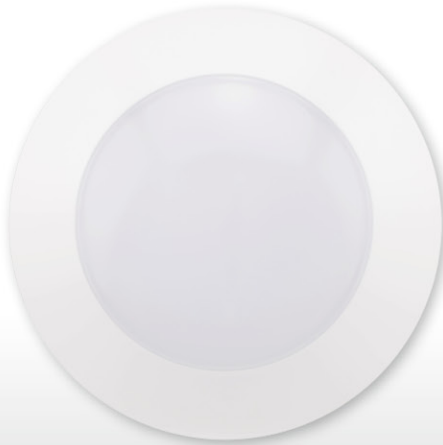

14.5W REPLACES




75W Inc.

80% Energy Savings

**\$203** Savings per lamp\*

- Innovative CLICK design
- Fits most 4" J-boxes and 5-6" recessed housings
- Installs in just minutes - no rewiring
- Exceptional color rendering CRI 90
- Richer reds and natural skin tones (R9 60, R13 90)
- Tight LED binning for consistent CCT across all lamps




## DOWNLIGHT PRODUCT FEATURES

### DUAL INSTALLATION:


#### 4" J-BOX FLUSHMOUNT

- Attach mounting bracket to J-box
- Click downlight into mounting bracket



#### 5-6" CAN RECESSED

- Connect E26 adapter to the LED adapter
- Squeeze mounting springs and push downlight up until flush with ceiling



### ACCESSORIES INCLUDED:



Mounting Bracket



J-Box Screws




Wire Nuts



LED Adapter



E26 Adapter



Mounting Springs

# 6" DOWNLIGHT 14.5W TITANIUM CRI<sup>SP</sup> LED SERIES 4.0



## APPLICATIONS

### General Lighting



### Recessed Lighting



### Accent Lighting



Ref.#:DS060-SMDL-6-14.5W

## SPECIFICATIONS\*\*

Product Model	40842 14.5SMDL6G4DIM/927	40843 14.5SMDL6G4DIM/930	40847 14.5SMDL6G4DIM/840
<b>Type</b>	6" SMDL	6" SMDL	6" SMDL
<b>Base</b>	E26 / LED Adapter (GU24 optional)	E26 / LED Adapter (GU24 optional)	E26 / LED Adapter (GU24 optional)
<b>Power (W)</b>	14.5	14.5	14.5
<b>Voltage - Frequency</b>	120V 60Hz	120V 60Hz	120V 60Hz
<b>Color Temp. (ANSI)</b>	Warm White 2700K	Warm White 3000K	Natural White 4000K
<b>CRI (Ra)</b>	90	90	80
<b>Typical lumens (lm)</b>	950	950	1150
<b>Efficacy (LPW)</b>	66	66	79
<b>Beam Angle</b>	110°	110°	110°
<b>Dimmable</b>	Yes***	Yes***	Yes***
<b>Housing Compatibility</b>	4" J-box / Most 5-6" housing	4" J-box / Most 5-6" housing	4" J-box / Most 5-6" housing
<b>Power Factor</b>	0.9	0.9	0.9
<b>Rated Lifetime - L70 (hrs.)</b>	40,000	40,000	40,000
<b>Dia. x MOL</b>	7.32"x1.30" (186x33mm)	7.32"x1.30" (186x33mm)	7.32"x1.30" (186x33mm)
<b>Weight (lb. / g)</b>	0.45lb. / 204g	0.45lb. / 204g	0.45lb. / 204g

\* Savings per lamp based on \$0.11 / kw energy cost, 12 hrs / day lamp usage, \$4 incandescent with 1000-hr lifetime, \$30 LED with 40,000-hr lifetime  
 \*\* Specification data is preliminary and may be subject to change

\*\*\* List of tested dimmer switches available on website  
 \*\*\*\* Suitable for damp locations. Not for use where directly exposed to weather or water