

SubstiTUBE™ IS T8 LED



Compatible T8 LED for use with instant start electronic T8 ballasts



Key Features & Benefits

- Lumen package:
 - Up to 1600 lumens on ISL
 - Up to 2000 lumens on ISN
 - Up to 2500 lumens on ISH
- CCT: 3000K, 3500K, 4100K, 5000K
- Beam angle: 150°
- Compatible with instant start electronic T8 ballasts
- THD <20%, power factor >0.90
- G13 medium bi-pin base
- Long life: 50,000 hour life (L₇₀)
- 5 year warranty (24 hour burn cycle)
- Reduces energy consumption up to 35%
- No warm-up time, instant-on with full light output and stable lamp to lamp color
- Glass free, vibration and impact resistant
- No UV emission
- Suitable for dry and damp locations (cannot come in direct contact with water)

SYLVANIA SubstiTUBE IS T8 LED lamps are an energy saving alternative, designed to replace traditional fluorescent T12 or T8 lamps. These shatterproof T8 LED lamps contain no mercury, provide instant light and a uniform light distribution.

Engineered to operate on existing instant start electronic T8 ballasts, these lamps minimize labor and recycling costs.

Product Offering

Length	Color Temperature	CRI
48in.	3000K, 3500K, 4100K, 5000K	80

Application Information

Applications

- Cooler/freezer case
- Cove lighting
- Display case
- General illumination
- High bay
- Parking garage
- Tunnels

Specifications and Certifications

cUL US
E327386 (lamp)

CLASSIFIED
cUL US
E350359



Specification Data

Catalog #	Type
Project	
Comments	
Prepared by	

Specifications

Energy Data

Ambient Operating Temperature: -4°F to 122°F (-20°C to 50°C)
EMI/RFI: FCC Title 47 CFR, Part 18, Non-Consumer
Input Voltage: 120-277V, 347V
Input Frequency: 50/60Hz
Power Factor: >0.90
THD: <20%

Lighting Data

Lumen Output: See specification table below (output is dependent on operating ballast)
Lumens per Watt: Up to 110
Correlated Color Temperature (CCT): 3000K, 3500K, 4100K, 5000K
Color Rendering Index (CRI): 80
R9: Up to 21

Ordering Information

Item Number	Ordering Abbreviation	Color Temp.	CRI	Beam Angle	Package Quantity
73312	LED19T8/L48/830/SUB	3000K	80	150	10
73313	LED19T8/L48/835/SUB	3500K	80	150	10
73314	LED19T8/L48/841/SUB	4100K	80	150	10
73315	LED19T8/L48/850/SUB	5000K	80	150	10

Specifications & Lighting Data

Ballast	Current (AMPS)	Input Power (W)	Input Lumens (lm)	System Efficacy (lm/W)	System No. of Lamps
QHE1x32T8/UNV ISL	0.13/0.06	15	1600	107	1
QHE2x32T8/UNV ISL	0.25/0.11	30	3300	110	2
QHE3x32T8/UNV ISL	0.38/0.17	46/45	4900	107/109	3
QHE4x32T8/UNV ISL	0.50/0.22	60/59	6400	107/109	4
QHE1x32T8/UNV ISN	0.16/0.07	19	2000	105	1
QHE2x32T8/UNV ISN	0.30/0.13	36	3900	108	2
QHE3x32T8/UNV ISN	0.43/0.19	51	5400	106	3
QHE4x32T8/UNV ISN	0.57/0.25	68	7200	106	4
QHE1x32T8/UNV ISH	0.21/0.09	26	2500	96	1
QHE2x32T8/UNV ISH	0.45/0.20	57	5300	93	2
QHE3x32T8/UNV ISH	0.64/0.28	77/76	7500	97/99	3

Preliminary specifications. Please contact OSRAM SYLVANIA for additional information.

Ordering Guide


LED	19	T8	/	L	48	/	8	35	/	SUB
LED	Wattage (ISN ballast)	Lamp Type		Length	48 Inches Overall Length		CRI 80	Color Temperature 35 = 3500K		SubstiTUBE™ IS (Compatible LED T8 for use with instant start T8 electronic ballasts)

Application Information

Application Notes

1. Operating temperature range between -4°F and 122°F (-20°C and 50°C).
2. Suitable for use in dry and damp environments.
3. Not intended for use with emergency light fixtures or exit lights.
4. Maximum mounting distance between tube and driver is 20 feet.
5. Under certain conditions, after powering the lighting system off, the lamps may restart momentarily then turn off due to residual capacitance; this does not affect product life.
6. Not compatible with QHE4x32T8/UNV ISH ballasts.
7. For detailed warranty information, please see www.sylvania.com

Assembly Diagram

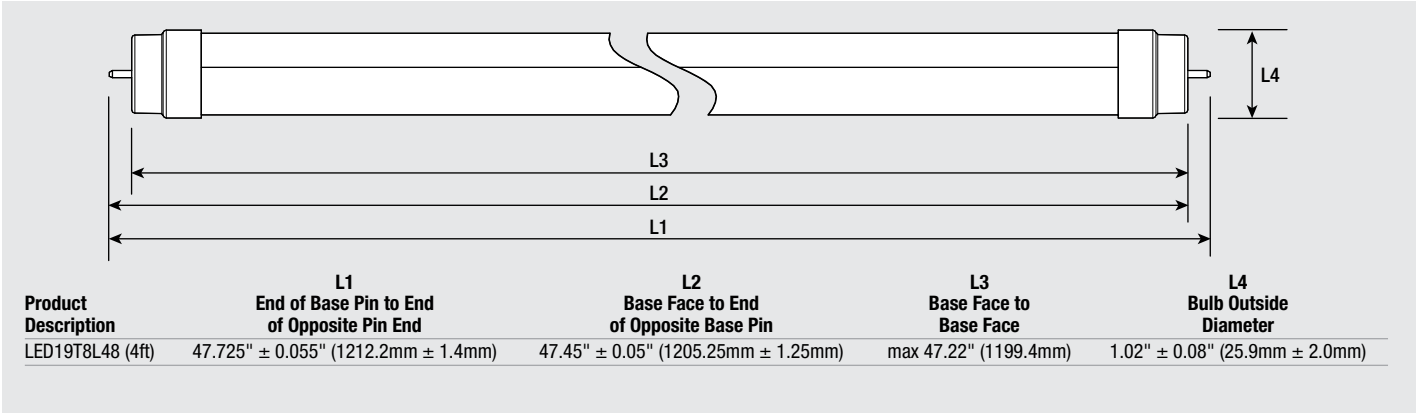

SYLVANIA is a registered trademark of OSRAM SYLVANIA Inc.
LED CREATING TOMORROW is a registered trademark of OSRAM GmbH.
Specifications subject to change without notice.

