

Round Flush Mount

LED

14 Watt 1000lms Round Flush Mount Specifications



The ETi 14 watt 1000 lumen LED round flush mount fixture offers exceptional performance for precision lighting applications, while reducing energy and maintenance cost when compared with conventional light sources. Lasting over 10 times longer, these flush mount fixtures are high quality replacements for incandescent flush mount fixtures and is available in 4000K. They are UL listed for use in damp and dry locations. ENERGY STAR rated. Warranty 5 years. Suitable for installations from – 4° F to 95° F.


KEY FEATURES & BENEFITS

- 14 Watt Low Power and High Performance
- 1000 lumens
- 82 CRI and 4000K
- UL-Damp and Dry Locations
- Replaces most applications using 100w incandescent lamps
- Rated life 35,000 hours



This light source meets restrictions on hazardous substances.

FIXTURE DIMENSIONS



SKU# 54074143

Dimension A = 11.8"

Dimension B = 3.7"

This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation. For FCC Part 15 user information, please see www.etiled.us/fcc15b

APPLICATION INFORMATION

Designed to be used anywhere a standard incandescent fixture is used. Typically used in bedrooms, hallways, kitchens, living rooms and recreational rooms. Other applications apply in commercial, office, retail, restaurants, schools, hospitals and hotel/motel locations.



ETi SOLID STATE™
LIGHTING
INC.

855-384-7754 www.etissl.com

Round Flush Mount

LED

SPECIFICATION DATA

Project _____

Item Number _____


Prepared by _____ Date _____

ORDERING INFORMATION

Item Number	Description	Wattage	Input Voltage (VAC)	Average Rated Life ¹	Typical Lumens ²	CCT ³	CRI ⁴	Power Factor	R9	Duv	CBCP	Beam	Operating Frequency
54074143	LED14w FLUSH-MOUNT 840100-277 NDIM	14	100-277	35,000	1000	4000K	82	>.95	26.1	.0015	270	120	50/60Hz
¹ Hours lifetime with 70% lumen maintenance													
² Thermally stable typical lumens (±10%)													
³ Thermally stable CCT (±10%)													
⁴ Color rendering index/Ra													

SHIPPING INFORMATION

Item Number	Item UPC	Item Dimensions (H x L x W)	Item Weight (lbs)	Inner Pack Qty	Inner Carton Bar Code	Inner Carton Dimensions (H x L x W)	Inner Pack Weight (lbs)	Master Pack Qty	Master Carton Bar Code	Master Dimensions (H x L x W)	Master Pack Weight (lbs)
54074143	836607008879	12.9" x 12.8" x 4.4"	1.9	N/A	N/A	N/A	N/A	6	50836607008874	14.1" x 27.8" x 13.8"	15.21

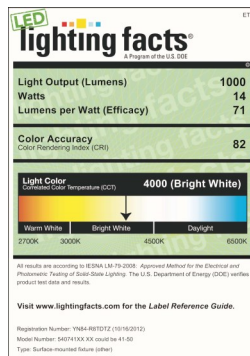

ADA Compliant

Meets American with Disabilities Act standard extension requirements

The Americas Headquarters
26650 Renaissance Parkway, STE 6
Cleveland, OH 44128

855-384-7754 **www.etissl.com**