

# Square Flush Mount

# LED

## 14 Watt 1050lms Square Flush Mount Specifications



The ETi 14 watt 1050 lumen LED square flush mount fixture offers exceptional performance for precision lighting applications, while reducing energy and maintenance cost when compared with conventional light sources. Lasting over 10 times longer, these flush mount fixtures are high quality replacements for incandescent flush mount fixtures and is available in 5000K. They are UL listed for use in damp and dry locations. Warranty 5 years. Suitable for installations from - 4° F to 95° F.


### KEY FEATURES & BENEFITS

- 14 Watt Low Power and High Performance
- 1050 lumens
- Dimmable
- 84 CRI, 5000K
- UL-Damp and Dry Locations
- Replaces most applications using 100w incandescent lamps
- Rated life 35,000 hours



This light source meets restrictions on hazardous substances.

### FIXTURE DIMENSIONS



SKU# 54616161

Dimension A = 12.0"

Dimension B = 3.2"

This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation. For FCC Part 15 user information, please see www.etiled.us/fcc15b

### APPLICATION INFORMATION

Designed to be used anywhere a standard incandescent fixture is used. Typically used in bedrooms, hallways, kitchens, living rooms and recreational rooms. Other applications apply in commercial, office, retail, restaurants, schools, hospitals and hotel/motel locations.



855-384-7754 www.etissl.com

# 14 Watt 1050lms Square Flush Mount

# LED

## SPECIFICATION DATA

Project \_\_\_\_\_

Item Number \_\_\_\_\_


Prepared by \_\_\_\_\_ Date \_\_\_\_\_

## ORDERING INFORMATION

Item Number	Description	Wattage	Input Voltage (VAC)	Average Rated Life <sup>1</sup>	Typical Lumens <sup>2</sup>	CCT <sup>3</sup>	CRI <sup>4</sup>	Power Factor	R9	Duv	CBCP	Beam	Operating Frequency
54616161	LED14w FLUSH-MOUNT 850120 DIM	14	120	35,000	1050	5000K	87.7	>.99	42	0.0022	284	118	60Hz
<sup>1</sup> Hours lifetime with 70% lumen maintenance													
<sup>2</sup> Thermally stable typical lumens (±10%)													
<sup>3</sup> Thermally stable CCT (±10%)													
<sup>4</sup> Color rendering index/Ra													

## SHIPPING INFORMATION

Item Number	Item UPC	Item Dimensions (H x L x W)	Item Weight (lbs)	Inner Pack Qty	Inner Carton Bar Code	Inner Carton Dimensions (H x L x W)	Inner Pack Weight (lbs)	Master Pack Qty	Master Carton Bar Code	Master Dimensions (H x L x W)	Master Pack Weight (lbs)
54616161	836607009128	14" x 13.9" x 4"	2	N/A	N/A	N/A	N/A	4	50836607009123	16.9" x 15" x 14.5"	9.9

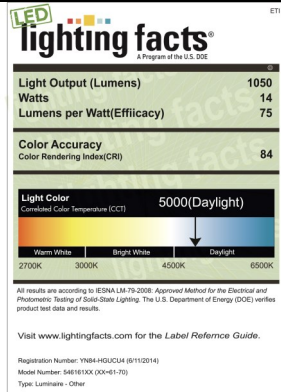

### ADA Compliant

Meets American with Disabilities Act standard extension requirements

**The Americas Headquarters**  
**26650 Renaissance Parkway, STE 6**  
**Cleveland, OH 44128**

855-384-7754 [www.etissl.com](http://www.etissl.com)