

Round Flush Mount

LED

22 Watt 1800lms Round Flush Mount Specifications



The ETi 22 watt 1800 lumen LED round flush mount fixture offers exceptional performance for precision lighting applications, while reducing energy and maintenance cost when compared with conventional light sources. Lasting over 10 times longer, these flush mount fixtures are high quality replacements for incandescent flush mount fixtures and is available in 5000K. They are UL listed for use in damp and dry locations. Warranty 5 years. Suitable for installations from - 4° F to 95° F.


KEY FEATURES & BENEFITS

- 22 Watt Low Power and High Performance
- 1800 lumens
- 83 CRI
- 5000K
- UL-Damp and Dry Locations
- Replaces most applications using 150w incandescent lamps
- Rated life 35,000 hours



This light source meets restrictions on hazardous substances.

FIXTURE DIMENSIONS



SKU# 54075161

Dimension A = 16.0"

Dimension B = 4.6"

This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation. For FCC Part 15 user information, please see www.etiled.us/fcc15b

APPLICATION INFORMATION

Designed to be used anywhere a standard incandescent fixture is used. Typically used in bedrooms, hallways, kitchens, living rooms and recreational rooms. Other applications apply in commercial, office, retail, restaurants, schools, hospitals and hotel/motel locations.

ETI SOLID STATE™
LIGHTING
INC.

855-384-7754 www.etissl.com

22 Watt 1800lms Round Flush Mount

LED

SPECIFICATION DATA

Project _____

Item Number _____


Prepared by _____ Date _____

ORDERING INFORMATION

Item Number	Description	Wattage	Input Voltage (VAC)	Average Rated Life ¹	Typical Lumens ²	CCT ³	CRI ⁴	Power Factor	R9	Duv	CBCP	Beam	Operating Frequency
54075161	LED22w FLUSH-MOUNT 850100-277 NDIM	22	100-277	35,000	1800	5000K	83	>.97	33	.0023	547	115	50/60Hz
¹ Hours lifetime with 70% lumen maintenance													
² Thermally stable typical lumens (±10%)													
³ Thermally stable CCT (±10%)													
⁴ Color rendering index/Ra													

SHIPPING INFORMATION

Item Number	Item UPC	Item Dimensions (H x L x W)	Item Weight (lbs)	Inner Pack Qty	Inner Carton Bar Code	Inner Carton Dimensions (H x L x W)	Inner Pack Weight (lbs)	Master Pack Qty	Master Carton Bar Code	Master Dimensions (H x L x W)	Master Pack Weight (lbs)
54075161	836607 009074	16" x 16" x 4.6"	2	N/A	N/A	N/A	N/A	4	50836607 009079	21.2" x 18.3" x 17.7"	15

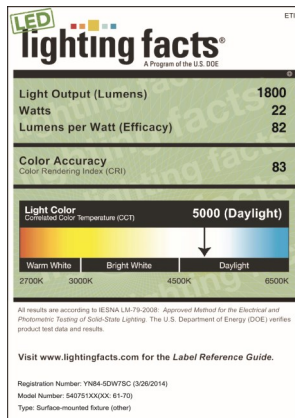

The Americas Headquarters
26650 Renaissance Parkway, STE 6
Cleveland, OH 44128

855-384-7754 www.etissl.com