Round Flush Mount   LED

11.5 Watt 830lms Round Flush Mount
Specifications

The ETi 11.5 watt 830 lumen LED round flush mount fixture offers exceptional performance for precision lighting applications, while reducing energy and maintenance cost when compared with conventional light sources. Lasting over 10 times longer, these flush mount fixtures are high quality replacements for incandescent flush mount fixtures and is available in 4000K. Warranty is 5 years or 60 months. UL listed for use in damp and dry locations. Suitable for installations from – 4° F to 104° F.

KEY FEATURES & BENEFITS

- 11.5 Watt Low Power & High Performance

- 830 lumens

- 84 CRI

- 4000K

- UL-Damp and Dry Locations

- Screws into existing lamp holder or Installs on Junction box

- Rated life 50,000 hours

UL LISTED · LEAD-FREE · Hg · RoHS compliant — This light source meets restrictions on hazardous substances.

FIXTURE DIMENSIONS

SKU# 54606242

Dimension A = 7.0"
Dimension B = 3.5"

This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation. For FCC Part 15 user information, please see www.etiled.us/fcc15b

APPLICATION INFORMATION

Designed to be used anywhere a standard incandescent lamp or fixture is used. Typically used in basements, utility rooms, garages, laundry rooms, and closets. The LED round flush mount fixture carries a 5 year warranty.

ENERGY STAR   ETi SOLID STATE LIGHTING INC.™

Round Flush Mount   LED

SPECIFICATION DATA

Project _____

Item Number_____

Prepared by_____Date_____

ORDERING INFORMATION

Item Number	Description	Wattage	Input Voltage (VAC)	Average Rated Life[1]	Typical Lumens[2]	CCT[3]	CRI[4]	Power Factor	R9	Duv	CBCP	Beam	Operating Frequency
54606242	LED11.5w FLUSH-MOUNT 840120 NDIM	11.5	120	50,000	830	4000K	84	>.95	52	.0039	222	120	60Hz

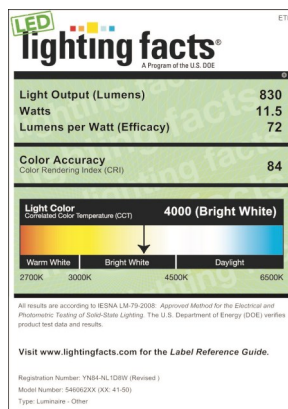[1] Hours lifetime with 70% lumen maintenance
[2] Thermally stable typical lumens (±10%)
[3] Thermally stable CCT (±10%)
[4] Color rendering index/Ra

SHIPPING INFORMATION

Item Number	Item UPC	Item Dimensions (H x L x W)	Item Weight (lbs)	Inner Pack Qty	Inner Carton Bar Code	Inner Carton Dimensions (H x L x W)	Inner Pack Weight (lbs)	Master Pack Qty	Master Carton Bar Code	Master Dimensions (H x L x W)	Master Pack Weight (lbs)
54606242	836607 008961	8.1" x 8.0" x 4.5"	1.2	N/A	N/A	N/A	N/A	5	50836607 008966	8.9" x 23.7" x 9.0"	7.8

LED lighting facts®
A Program of the U.S. DOE

ETI

Light Output (Lumens)	830
Watts	11.5
Lumens per Watt (Efficacy)	72

| Color Accuracy Color Rendering Index (CRI) | 84 |

Light Color Correlated Color Temperature (CCT)   4000 (Bright White)

Warm White | Bright White | Daylight
2700K   3000K   4500K   6500K

All results are according to IESNA LM-79-2008: Approved Method for the Electrical and Photometric Testing of Solid-State Lighting. The U.S. Department of Energy (DOE) verifies product test data and results.

Visit www.lightingfacts.com for the Label Reference Guide.

Registration Number: YN84-NL1D8W (Revised)
Model Number: 546062XX (XX: 41-50)
Type: Luminaire - Other

The Americas Headquarters
26650 Renaissance Parkway, STE 6
Cleveland, OH 44128

855-384-7754   www.etissl.com

54606242 updated 10/17/2014