



LED Lamps - General Purpose



Selectable LED A-Line Lamps

Current's LumenChoice® + SpectraChoice™ selectable LED lamps offer unmatched flexibility in a single lamp, and feature built-in switches to change wattage and color temperature, no tools required.



LumenChoice® + SpectraChoice™

PERFORMANCE HIGHLIGHTS:

| Selectable LED A-Line Lamps | |
|-----------------------------|--|
| Light Output: | Up to 1,600 Lumens |
| CRI: | 90 |
| Selectable CCT: | Standard: 2700K/3000K/3500K/4000/5000K Warm: 1800K/2200K/2500K/2700/3000K |
| Input Voltage: | 120 |
| Efficiency: | Up to 107 LPW |
| Wattage: | 6W, 10W, 13W, 15W; 4W/7W/9.5W/14W |
| Life: | 15,000 hours L70 |
| Temperature Rating: | -20°C to 45°C |
| Location Rating: | Damp |

LIMITED WARRANTY

3 years

LEARN MORE:

To learn more about saving money and energy, go to www.LED.com.

FEATURES:

Color Temperature Selectability:

- SpectraChoice™: five color temperature levels that can be adjusted with a built-in switch, no tool required

Wattage/Lumen Selectability:

- LumenChoice®: four wattage/lumen levels that can be adjusted with a built-in switch, no tool required
- Lamps are offered in 40, 60, 75 & 100W incandescent equivalent lumens
- 15,000 hours rated life (L70)
- High Color Rendering (90 CRI) & CEC Title 20 Compliant
- These lamps are energy efficient, contain no lead or mercury, and are compliant with material restriction requirements of RoHS

BENEFITS:

- Energy + Cost Savings
- Use one lamp for many applications, simplifying project management by streamlining BOMs
- One lamp can replace many, greatly reducing inventory
- One lamp can be used to match the color in a variety of spaces, reducing stock and potential for color mismatch
- Energy efficiency and long life mean fewer lamp replacements versus standard incandescent and halogen light sources



Selectable **LED Lamps**

Do more with less.

- *Reduce Inventory*
- *Simplify Projects*
- *Optimize Solutions*



LED Lamps - General Purpose

Selectable LED A-Line Lamps

CUSTOMER NAME _____
 PROJECT NAME _____
 DATE _____ NOTES _____



Selectable SpectraChoice™ A-Line Lamps (Dimmable)

| Bulb Shape | Base Type | Watts | Order Code | Description | Volts | Carton Qty ² | MOL (In) | Lumens (Initial) ³ | Selectable Color Temp. (Initial)* | CRI | Wattage Replacement | Rated Life L70 (Hrs) ¹ | Dimmable | Location Rating ³ | Additional Information |
|---|-----------|-------|------------|-----------------|-------|-------------------------|----------|-------------------------------|--|-----|---------------------|-----------------------------------|----------|------------------------------|------------------------|
| A-Line SpectraChoice™ Selectable Color Temperature | | | | | | | | | | | | | | | |
| A19 | E26 | 6 | 93313531 | LED6DA19/9SC/E | 120 | 24 | 4.3 | 480 | 2700K* 3000K 3500K 4000K 5000K | 90 | 40 | 15,000 | Yes | Damp, Enclosed | White, CEC Title 20 |
| A19 | E26 | 10 | 93313549 | LED10DA19/9SC/E | 120 | 24 | 4.3 | 800 | 2700K* 3000K 3500K 4000K 5000K | 90 | 60 | 15,000 | Yes | Damp, Enclosed | White, CEC Title 20 |
| A19 | E26 | 13 | 93313543 | LED13DA19/9SC | 120 | 24 | 4.7 | 1100 | 2700K* 3000K 3500K 4000K 5000K | 90 | 75 | 15,000 | Yes | Damp | White, CEC Title 20 |
| A19 | E26 | 15 | 93313537 | LED15DA19/9SC | 120 | 24 | 4.7 | 1600 | 2700K* 3000K 3500K 4000K 5000K | 90 | 100 | 15,000 | Yes | Damp | White, CEC Title 20 |

¹ The life rating is based on the hours of operation the lamp will provide before reaching 70% of its original lumen output (L70)

² Minimum order quantity = Carton Qty

³ UL 1993 Environmental Requirements for LED LAMPS

Damp Location – Exterior or interior location that is normally or periodically subject to condensation of moisture in, on, or adjacent to electrical equipment, including partially protected locations


* Default color temperature setting noted by "*" in tables above



LED Lamps - General Purpose

Selectable LED A-Line Lamps

CUSTOMER NAME _____
 PROJECT NAME _____
 DATE _____ NOTES _____

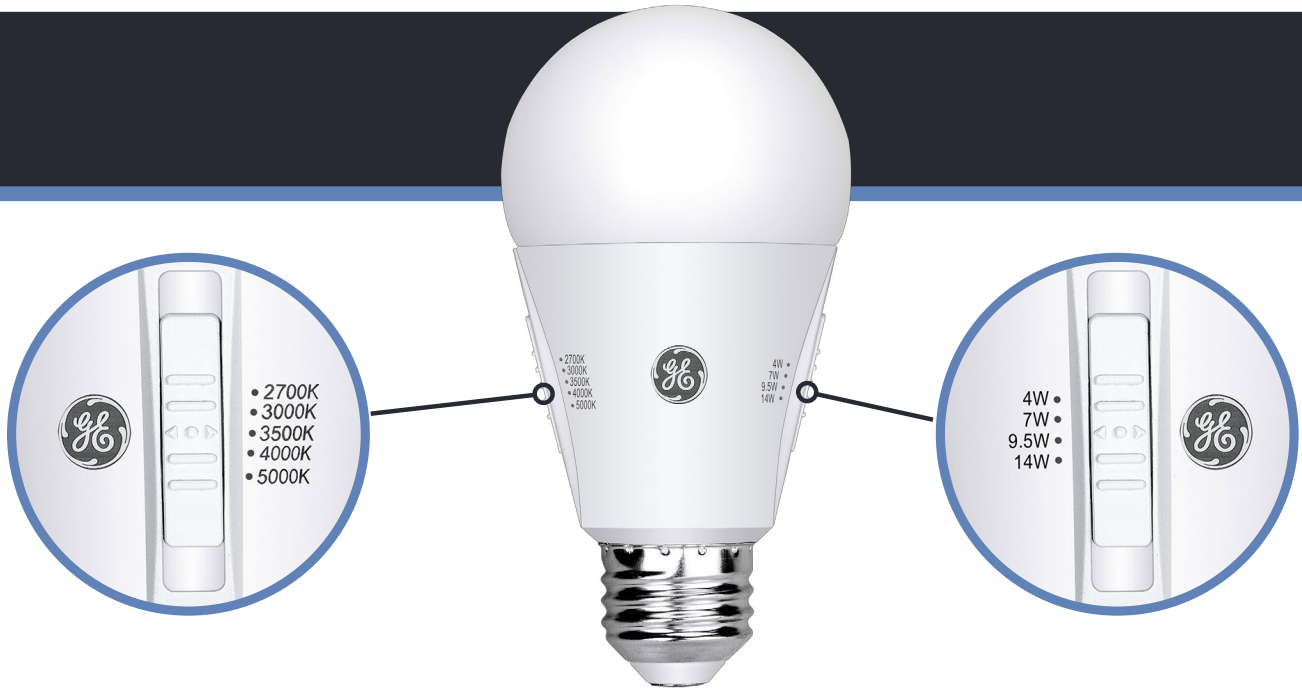

Selectable LumenChoice® + SpectraChoice™ A-Line Lamps (Dimmable)

| Bulb Shape | Base Type | Order Code | Description | Volts | Carton Qty ² | MOL (In) | Selectable Watts* | Selectable Lumens (Initial)* | Selectable Color Temp. (Initial)* | CRI | Wattage Replacement | Rated Life L70 (Hrs) ¹ | Dimmable | Location Rating ³ | Additional Information |
|--|-----------|------------|-----------------|-------|-------------------------|----------|----------------------|------------------------------|--|-----|-----------------------|-----------------------------------|----------|------------------------------|------------------------|
| A-Line Selectable LumenChoice® + SpectraChoice™ | | | | | | | | | | | | | | | |
| A19 | E26 | 93322361 | LED/LC/DA19/9SC | 120 | 12 | 4.7 | 4 7* 9.5 14 | 500 800* 1100 1600 | 2700K* 3000K 3500K 4000K 5000K | 90 | 40 60 75 100 | 15,000 | Yes | Damp | White, CEC Title 20 |

¹ The life rating is based on the hours of operation the lamp will provide before reaching 70% of its original lumen output (L70)
² Minimum order quantity = Carton Qty
³ UL 1993 Environmental Requirements for LED LAMPS
 Damp Location – Exterior or interior location that is normally or periodically subject to condensation of moisture in, on, or adjacent to electrical equipment, including partially protected locations
 * Default wattage and color temperature settings noted by "*" in tables above



LED Lamps - General Purpose

Selectable LED A-Line Lamps

CUSTOMER NAME _____
 PROJECT NAME _____
 DATE _____ NOTES _____



Warm Selectable LumenChoice® + SpectraChoice™ A-Line Lamps (Dimmable)

| Bulb Shape | Base Type | Order Code | Description | Volts | Carton Qty ² | MOL (In) | Selectable Watts* | Selectable Lumens (Initial)* | Selectable Color Temp. (Initial)* | Wattage Replacement | CRI | Rated Life L70 (Hrs) ¹ | Dimmable | Location Rating ³ | Additional Information |
|--|-----------|------------|------------------|-------|-------------------------|----------|-------------------|------------------------------|-----------------------------------|---------------------|-----|-----------------------------------|----------|------------------------------|------------------------|
| | | | | | | | | | | | | | | | |
| A-Line Warm Selectable LumenChoice® + SpectraChoice™ | | | | | | | | | | | | | | | |
| | | | | | | | 4 | 350 | 1800K | 40W | | | | | |
| | | | | | | | | 400 | 2200K | 40W | | | | | |
| | | | | | | | | 450 | 2500K | 40W | | | | | |
| | | | | | | | | 500 | 2700K | 40W | | | | | |
| | | | | | | | | 500 | 3000K | 40W | | | | | |
| | | | | | | | 7* | 600 | 1800K | 60W | | | | | |
| | | | | | | | | 700* | 2200K* | 60W | | | | | |
| | | | | | | | | 750 | 2500K | 60W | | | | | |
| | | | | | | | | 800 | 2700K | 60W | | | | | |
| | | | | | | | | 800 | 3000K | 60W | | | | | |
| A19 | E26 | 93322367 | LED/LC/DA19/9WSC | 120 | 12 | 4.7 | | 800 | 1800K | 75W | 90 | 15,000 | Yes | Damp | White, CEC Title 20 |
| | | | | | | | | 900 | 2200K | 75W | | | | | |
| | | | | | | | 9.5 | 1000 | 2500K | 75W | | | | | |
| | | | | | | | | 1100 | 2700K | 75W | | | | | |
| | | | | | | | | 1100 | 3000K | 75W | | | | | |
| | | | | | | | | 1100 | 1800K | 100W | | | | | |
| | | | | | | | 14 | 1300 | 2200K | 100W | | | | | |
| | | | | | | | | 1500 | 2500K | 100W | | | | | |
| | | | | | | | | 1600 | 2700K | 100W | | | | | |
| | | | | | | | | 1600 | 3000K | 100W | | | | | |

¹ The life rating is based on the hours of operation the lamp will provide before reaching 70% of its original lumen output (L70)
² Minimum order quantity = Carton Qty
³ UL 1993 Environmental Requirements for LED LAMPS
 Damp Location – Exterior or interior location that is normally or periodically subject to condensation of moisture in, on, or adjacent to electrical equipment, including partially protected locations
 * Default wattage and color temperature settings noted by "*" in tables above