

LR38 VNSP

4° SPECIALTY SPOT

PAR38 | RETROFIT LAMP


- / 120 V
- / 50,000 Hours (L70)
- / Halogen PAR form factor (ANSI compliant)
- / Halogen PAR38 Aperture (MOL: 5 3/8")
- / Lightest LED lamps on the market
- / RoHS-compliant
- / Dry location rating
- / ETL Certified to UL Standard 1993
- / Contain no lead or mercury
- / Fully dimmable; Compatibility list available.

- / Base Types: E26 Standard; GU24*
- / Recommended for use in open environment fixtures
- / Approved for use in recessed IC and non-IC rated fixtures with open apertures only

- / Highest center beam candle power (**105,000 CBCP**) LED lamp on market
- / Narrowest beam spread of any replacement LED lamp on the market.
- / *90+ High CRI available for 27K and 30K. Consult factory for availability in other color temperatures. To order, replace 'K' in CCT designation with 'h' in code below.




Weight: 9.6 oz.

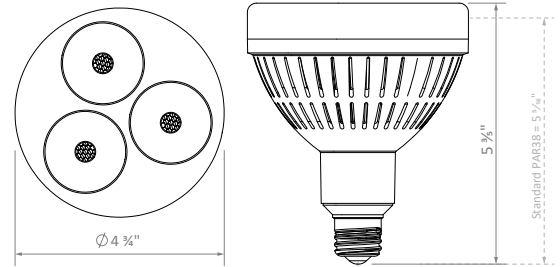

Ordering Information

Example: LR38/04/30K/400/BK

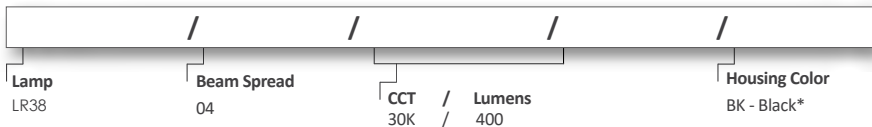

NOTE: This product has a MOL ≠ standard PAR38
Please verify fit prior to ordering

Product Code				Power (Watts)	CBCP (cd)	Standard CRI
Lamp	Beam Angle	CCT	Delivered Lumens			
LR38 VNSP	4	30K	400	9.5	105000	83

*Consult factory for lead time and availability
Note: High CRI products will produce up to 20% less measured lumens than their standard CCT equivalent.



Luxiance utilizes active cooling to remove heat from the LED system - allowing Solais LED lamps to operate cooler, resulting in superior life, light output, and performance.



Thermal Throttle – In the event that Solais products begin to overheat, they will undetectably dim themselves to protect your technology investments.



Warranty



IES Files



Dimmers

WARNING: Not for use in fully enclosed luminaires. Risk of electric shock. Use in an indoor, dry location only. This device is not intended for use with emergency exit fixtures or emergency exit lights. May not be compatible with all dimmers; please visit solais.com/dimming for up-to-date dimmer compatibility information.

NOTES: This device complies with Part 15 of the FCC Rule. This product may cause interference with other devices. If interference occurs, change the locations of the products involved. **Compatible on 120v systems.**