

FEATURES

- Quick and simple aircraft cable hanging system or pendant mount bracket available
- Long-life, 60,000 hour LEDs at L80 reduce life cycle maintenance costs
- Four LED color choices and 83 CRI
- Diffuse Wrap Lens available
- Utilizes TIR directional linear optics for optimal aisle lighting performance
- Available in narrow or wide distribution
- Fixed output or 0-10V dimming drivers ; 1% dimming optional
- Easy access to LED boards and drivers
- CSA listed and suitable for damp locations
- Available with factory installed On/Off or Dimming Occupancy Sensors with wide or aisle lens option
- Design Lights Consortium (DLC) qualified
- Five year warranty


ORDERING INFORMATION

LWS							
MODEL	LUMEN OUTPUT	DISTRIBUTION	VOLTAGE	OPTIONS			
LWS LED Suspended High Bay	ML Medium Lumen HL High Lumen VL Very High Lumen XL Xtra High Lumen See Product Availability Table below.	AC Aisle-Clear Optics AD Aisle-Diffuse Optics W Wide (SFA option recommended with W distribution)	U 120V-277V 347 347V 480 480V	C6TL15_ 6' Cord and Twist-Lock™ Plug 15A (Add Voltage: 1=120, 2=277) C6TL20_ 6' Cord and Twist-Lock™ Plug 20A (Add Voltage 1=120, 2=277) C6P151_ 6' Cord and Straight Blade Plug 15A (Add Voltage: 1=120V, 2=277V) F3CX 3-Conductor Cord (add length for X: 5=5', 10=10', 15=15') F4CX 4-Conductor Cord (add length for X: 5=5', 10=10', 15=15') F5CX 5-Conductor Cord (add length for X: 5=5', 10=10', 15=15') ELL14 Emergency Battery Pack Installed, 1400 Lumens ^{2,3} SFA Smooth Frosted Acrylic Wrap Lens GLR Fast Blow Fuse PM Pendant Mounting Bracket 3/4" (pendant not included) OS1360 Factory Installed Occupancy/Daylight, Sensor, 1-relay, 360° lens 120/277 OS2360 Factory Installed Occupancy/Daylight, Sensor, 2-relay, 360° lens 120/277 OS1A Factory Installed Occupancy/Daylight Sensor, 1-relay, Aisle lens, 120/277 OS2A Factory Installed Occupancy/Daylight Sensor, 2-relay, Aisle lens, 120/277 ODS1360 Factory Installed Dimming Occupancy/Daylight Sensor, 1-relay, 360° lens 120/277 ODS1A Factory Installed Dimming Occupancy/Daylight Sensor, 1-relay, Aisle lens 120/277			
COLOR TEMP	DRIVER						
30 3000K 35 3500K 40 4000K 50 5000K	E Fixed Output ED 0-10V Dimming ED1 0-10V Dimming to 1% ¹						
ACCESSORIES (ORDER SEPARATELY)							
LWSQM5 Aircraft Cable 5' (Pair) LWSQM10 Aircraft Cable 10' (Pair) C6TL15-120 Cord & Plug Kit, 6 ft, Twist Lock NEMA L5-15P, 15 amp, 120V, White C6TL15-277 Cord & Plug Kit, 6 ft, Twist Lock NEMA L7-15P, 15 amp, 277V, White C6P15-120 Cord & Plug Kit, 6 ft, Straight Blade NEMA 5-15P, 15 amp, 120V, White							

¹ED1 available with ML and HL only

²Not available in 347V or 480V

³For compatibility with Dual-Lite LiteGear® inverters, contact Hubbell Lighting Representative

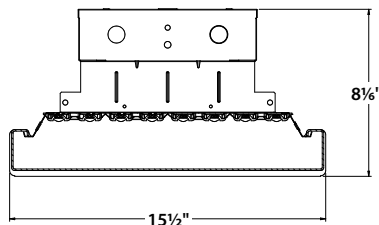

PRODUCT AVAILABILITY

OUTPUT	NOMINAL LUMENS	WATTS	LPW	AMBIENT
ML	9,750-11,115	87	124	55°C
HL	11,050-14,540	110	125	40°C
VL	13,780-16,910	146	119	40°C
XL	15,300-20,400	163	118	40°C