



GE  
Lighting

### 10326 - GE Ecolux® Starcoat® T8

#### F32T8XLSPX35HLEC

☞ Passes TCLP, which can lower disposal costs.

#### Product Photo



#### GENERAL CHARACTERISTICS

Base Description	Medium Bi-Pin
Base Type	Pin/Plug-In
Mercury Content	2.95 mg
Mercury-Picogram per mean lm hr	24.9
Rated Life Instant Start-Hrs	25000 h @ 3 h 36000 h @ 12 h
Rated Life Rapid Start - Hrs	40000 h @ 3 h 45000 h @ 12 h
Starting Temp (MIN) C-degrees	10 °C
Bulb Material	Soda lime
Rated Life Hours-nominal	40000 h
Primary Application	Full Wattage
Product Technology	Linear Fluorescent
Base	G13
Bulb Shape	T8

#### PHOTOMETRIC CHARACTERISTICS

Mean Lumens nominal	2915 lm
Nominal Initial Lumen per Watt	97
Initial Lumens-nominal	3100 lm
Color Rendering Index-CRI	85
Color Temperature	3500 K

#### PRODUCT INFORMATION

Product Code	10326
Description	F32T8XLSPX35HLEC
Alternative Unit Of Measure	Case
Standard Package Quantity	36
Ean UPC	043168103268
Standard Package GTIN	10043168103265
No Of Items Per Sales Unit	1
No Of Items Per Standard Package	36
Sales Unit	Unit
UCC	043168103268

#### DIMENSIONS

Bulb Diameter (DIA) <Max>	1.1 in
Bulb Diameter (DIA) <Min>	0.94 in
Diameter	1 in
End of Base Pin to Pin	47.67 in
Face to End of Opposing Pin (B) <Max>	47.5 in
Face to End of Opposing Pin (B) <Min>	47.4 in
Nominal Length	48 in

#### ELECTRICAL CHARACTERISTICS

Scotopic/Photopic Ratio	1.5
Current Crest Factor (MAX)	1.7
Open Circuit Voltage (rapid start) Min @ Temperature	315.00 V @ 10 °C
Cathode Resistance Ratio - Rh/Rc (MIN)	4.250
Cathode Resistance Ratio - Rh/Rc (MAX)	6.500
Rated power (Watts)	32 W

#### CAUTIONS & WARNINGS




##### Caution

- Lamp may shatter and cause injury if broken
- Wear safety glasses and gloves when handling lamp.
- Do not use excessive force when installing lamp.

##### Warning

- Risk of Electric Shock
- Turn power off before inspection

installation or removal.

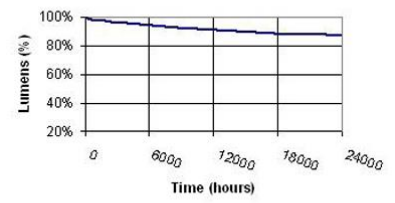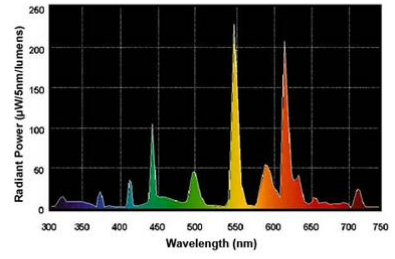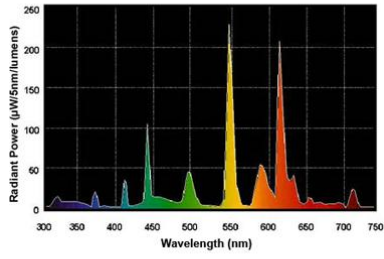

Aug 13, 2015 7:52:21 PM For additional information, visit [www.gelighting.com](http://www.gelighting.com)