



GE  
Lighting

46699 - GE Ecolux® Starcoat® T5

F24W/T5/830/ECO

☞ Passes TCLP, which can lower disposal costs.

## Product Photo



## GENERAL CHARACTERISTICS

Base Description	Miniature Bi-Pin
Base Type	Pin/Plug-In
Mercury Content	2.5 mg
Mercury-Picogram per mean lm hr	45.3
Rated Life Rapid Start - Hrs	30000 h @ 3 h 36000 h @ 12 h
Starting Temp (MIN) C-degrees	-20 °C
Bulb Material	Soda lime
Rated Life Hours-nominal	30000 h
Primary Application	Full Wattage
Product Technology	Linear Fluorescent
Base	G5
Bulb Shape	T5

## PHOTOMETRIC CHARACTERISTICS

Mean Lumens nominal	1840 lm
Nominal Initial Lumen per Watt	83
Initial Lumens-nominal	2000 lm
Color Rendering Index-CRI	85
Color Temperature	3000 K

## PRODUCT INFORMATION

Product Code	46699
Description	F24W/T5/830/ECO
Alternative Unit Of Measure	Case
Standard Package Quantity	40
Ean UPC	043168466998
Standard Package GTIN	10043168466995
No Of Items Per Sales Unit	1
No Of Items Per Standard Package	40
Sales Unit	Unit
UCC	043168466998

## DIMENSIONS

Bulb Diameter (DIA) <Max>	0.67 in
Diameter	0.625 in
Face to End of Opposing Pin (B) <Max>	21.89 in
Face to End of Opposing Pin (B) <Min>	21.79 in
Nominal Length	21.6 in

## ELECTRICAL CHARACTERISTICS

Scotopic/Photopic Ratio	1.3
Current Crest Factor (MAX)	1.7
Open Circuit Voltage (rapid start) Min @ Temperature	280.00 V @ 10 °C
Cathode Resistance Ratio - Rh/Rc (MIN)	4.250
Cathode Resistance Ratio - Rh/Rc (MAX)	6.500
Rated power (Watts)	24 W

## CAUTIONS & WARNINGS


### Caution

- Lamp may shatter and cause injury if broken
- Wear safety glasses and gloves when handling lamp.
- Do not use excessive force when installing lamp.

### Warning

- Risk of Electric Shock
- Turn power off before inspection installation or removal.



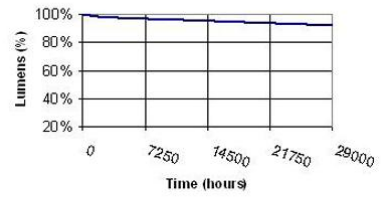

Aug 4, 2015 8:23:25 PM For additional information, visit [www.gelighting.com](http://www.gelighting.com)