



GE
Lighting

46748 - GE Ecolux® Starcoat® T5

F39W/T5/865/ECO

☞ Passes TCLP, which can lower disposal costs.

Product Photo



GENERAL CHARACTERISTICS

Base Description	Miniature Bi-Pin
Base Type	Pin/Plug-In
Mercury Content	2.5 mg
Mercury-Picogram per mean lm hr	27.2
Rated Life Rapid Start - Hrs	30000 h @ 3 h 36000 h @ 12 h
Starting Temp (MIN) C-degrees	-20 °C
Bulb Material	Soda lime
Rated Life Hours-nominal	30000 h
Primary Application	Full Wattage
Product Technology	Linear Fluorescent
Base	G5
Bulb Shape	T5

PHOTOMETRIC CHARACTERISTICS

Mean Lumens nominal	3060 lm
Nominal Initial Lumen per Watt	85
Initial Lumens-nominal	3330 lm
Color Rendering Index-CRI	85
Color Temperature	6500 K

PRODUCT INFORMATION

Product Code	46748
Description	F39W/T5/865/ECO
Alternative Unit Of Measure	Case
Standard Package Quantity	40
Ean UPC	043168467483
Standard Package GTIN	10043168467480
No Of Items Per Sales Unit	1
No Of Items Per Standard Package	40
Sales Unit	Unit
UCC	043168467483

DIMENSIONS

Bulb Diameter (DIA) <Max>	0.67 in
Diameter	0.625 in
Face to End of Opposing Pin (B) <Max>	33.7 in
Face to End of Opposing Pin (B) <Min>	33.61 in
Nominal Length	33.4 in

ELECTRICAL CHARACTERISTICS

Scotopic/Photopic Ratio	2.2
Current Crest Factor (MAX)	1.7
Open Circuit Voltage (rapid start) Min @ Temperature	350.00 V @ 10 °C
Cathode Resistance Ratio - Rh/Rc (MIN)	4.250
Cathode Resistance Ratio - Rh/Rc (MAX)	6.500
Rated power (Watts)	39 W

CAUTIONS & WARNINGS

Warning

Risk of Electric Shock

Turn power off before inspection
installation or removal.


Caution

Lamp may shatter and cause injury if broken

Wear safety glasses and gloves when handling lamp.

Do not use excessive force when installing lamp.



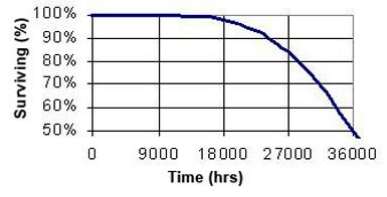

Aug 5, 2015 1:25:10 PM For additional information, visit www.gelighting.com