




OLPL11 Series 1' x 1' LED Edge-Lit Panel

Project: _____
 Fixture Type: _____
 Catalog Number: _____
 Notes: _____



Designed to provide comfortable glare-free illumination while significantly reducing energy consumption and maintenance costs the Ohyama Lights 1'x1' LED Edge-Lit Panel is an ideal replacement for fluorescent fixtures in offices, schools, hospitality and other commercial applications. Available in both 4000K and 5000K correlated color temperatures (CCT) the OLPL11 enables uniform light distribution to create eye-pleasing environments. The OLPL11 Series is also dimmable and compatible with DALI system controls to allow adjustment to meet the users' preference.

Performance Overview	
Watts:	20 / 35
CCT:	4000K / 5000K
Lumens:	1700 / 2600
Beam Angle:	112°
CRI:	> 80
Dimming:	0-10V, DALI
Input Rating - AC:	100~277V; 50/60Hz
Output Rating - DC:	36~42V; 0.472A
Max. Operating Temp:	50°C
Min. Operating Temp:	-20°C
PFC:	>0.92
UL Listed - Suitable For Dry Locations	
Lifetime:	40,000 Hours
Limited Warranty:	5 Years
Construction	
White Aluminum frame	
Diffuser + Light Guide + Reflector	
LG LED Chips	

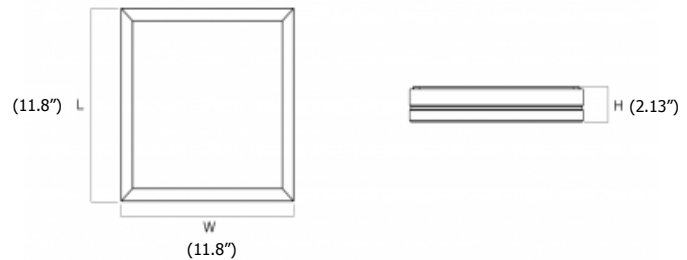

(L) 11.8" (300mm)
 (W) 11.8" (300mm)
 (H) 2.04" (52mm)
 Weight: 5.5 lbs.


Ordering Information

ITEM	MODEL	SIZE / SHAPE	CCT	LUMEN	WATTS	LM/W
399553	OLPL11S-2N-UNV	1' x 1'	4000K	1700	20	89
399549	OLPL11S-2C-UNV	1' x 1'	5000K	1700	20	89
399554	OLPL11S-4N-UNV	1' x 1'	4000K	2600	35	76
399550	OLPL11S-4C-UNV	1' x 1'	5000K	2600	35	76



*NOTE: Photometrics for OLPL11-4N-UNV
IES Files Available Upon Request

CANDELA DISTRIBUTION

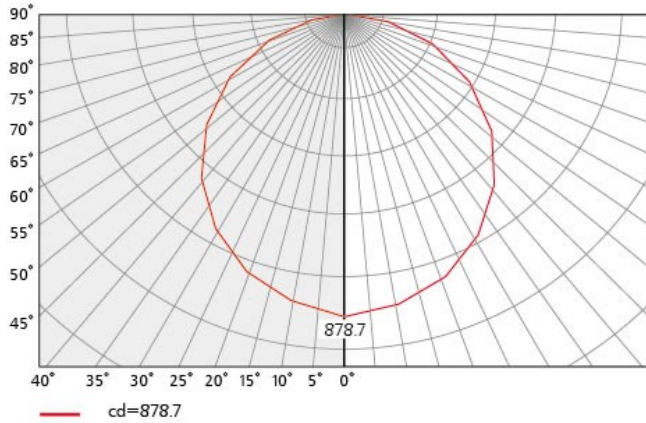

Recommended Dimmers

Option #1: Lutron NTSTV-DV w/PP120

Option #2: Lutron DVTV

Option #3 Cooper DF-10

Note: The inclusion of a dimmer on this list does not guarantee compatibility in all installations and conversely, the absence of a dimmer from this list doesn't imply incompatibility.

Lux at a Distance			
1m	878.6 lx	294 cm	299 cm
1.5m	390.4 lx	441 cm	448 cm
2m	219.7 lx	588 cm	598 cm
2.5m	140.6 lx	735 cm	747 cm
3m	97.6 lx	882 cm	896 cm
3.5m	71.7 lx	1029 cm	1046 cm
4m	54.9 lx	1176 cm	1195 cm
4.5m	43.4 lx	1323 cm	1345 cm
5m	35.1 lx	1470 cm	1494 cm

Vert. Spread : 112 deg.

Horiz. Spread : 112.4 deg.