


accent

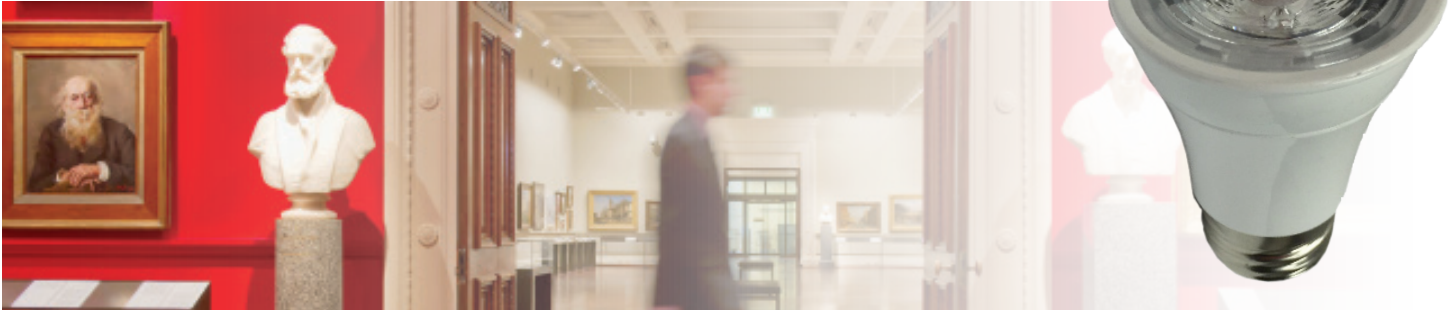

The bright white radiance of GE's LED PAR16 lamps isn't just something you see, it's something you feel.

LED PAR16 lamps

For accent lighting applications, GE's dimmable 4-watt and 6-watt LED PAR16 lamps offer the ideal solution.

LOW-COST OPERATION

- For example, using only 4 watts of energy, save over \$83 in energy costs over the rated life of a lamp versus a 35-watt halogen lamp based on \$0.11 per kWh
- Energy efficiency and long life mean fewer lamp replacements versus standard incandescent and halogen light sources

EXCELLENT COLOR RENDERING

- Available with a CRI of 80

COLOR TEMPERATURE

- Halogen-like color
- Available in 3000K

LONG LIFE

- Up to 25,000 hours rated life (L70)

DIMMABLE

- Dims from 100% to 10%

BEAM PATTERNS

- Available in 35° beam patterns

ENVIRONMENTALLY CONSCIOUS

- These lamps are energy efficient, contain no lead or mercury, and are compliant with material restriction requirements of RoHS

GE QUALITY AND RELIABILITY

- 3-year limited warranty

To learn more about saving money and energy, go to: gelighting.com/ThinkLED

When you Think LED lighting, Think GE.

ecomagination™




imagination at work

Information provided is subject to change without notice. Please verify all details with GE. All values are design or typical values when measured under laboratory conditions, and GE makes no warranty or guarantee, expressed or implied, that such performance will be obtained under end-use conditions.

LED PAR16 lamps

Directional Lamps (PAR)

Bulb Shape	Base Type	Watts	Order Code	Description	Volts	Case Qty**	MOL (In)	Lumens Initial	CBCP	Initial Color Temp	CRI	Wattage Replacement	*Rated Life L70 (Hrs)	Dimmable	ENERGY STAR® Status	#Location Rating	Additional Information	
Compact PAR16																		
	MED	4	26383	LED4D/P16/NFLTP	120	3	2.8	260	720	3000	80	40W	25,000	Yes	★	Dry	Flood, 35° beam, White	
		6	26384	LED6D/P16/NFLTP	120	3	2.8	380	1100	3000	80	60W	25,000	Yes	★	Dry	Flood, 35° beam, White	

Get more information at
GELighting.com/ThinkLED

Information provided is subject to change without notice. Please verify all details with GE. All values are design or typical values when measured under laboratory conditions, and GE makes no warranty or guarantee, expressed or implied, that such performance will be obtained under end-use conditions.

* The life rating is based on the hours of operation the lamp will provide before reaching 70% of its original rating (L70)

** Minimum order quantity = 6

★ ENERGY STAR® status: ENERGY STAR® certified. Lamps without a ★ are not ENERGY STAR® certified.

UL 1993 Environmental Requirements for LED LAMPS

Location, damp – Exterior or interior location that is normally or periodically subject to condensation of moisture in, on, or adjacent to, electrical equipment, and includes partially protected locations.

Location, dry – Location not normally subject to dampness, may include a location subject to temporary dampness, i.e., building under construction, provided ventilation is adequate to prevent an accumulation of moisture.

Location, wet – Location in which water or other liquid can drip, splash, or flow on or against electrical equipment.

Notes: 1) Product descriptions ending in "TP" indicate a carded blister or clamshell package nested in a tray for shelf display. Cards also designed for hook display.



Product is compliant with material restriction requirements of RoHS

ENERGY STAR® and the ENERGY STAR® logo are registered U.S. marks



www.gelighting.com

GE and the GE Monogram are trademarks of the General Electric Company. All other trademarks are the property of their respective owners. Information provided is subject to change without notice. All values are design or typical values when measured under laboratory conditions. GE Lighting and GE Lighting Solutions, LLC are businesses of the General Electric Company. © 2016 GE.

63557 (Rev 03/01/17)